



# CATALOG 2026



# GLOBAL DECKING SYSTEM

As decking specialists for over 20 years, we are committed to developing sustainable, high-quality solutions on a daily basis. Cobra guarantees reliable, proven products that create value through innovations combining performance and environmental responsibility.

From the design stage onwards, we make a special effort to use recycled materials, reduce packaging, and cut fossil fuel consumption.

Our teams develop unique products such as Hybrid universal clips with integrated screws, which allow for faster installation of all types of decking boards without pre-drilling.

Our goal is to make deck construction more reliable and simpler by providing solutions such as the STRUCTURAL concept, a complete, versatile, and rot-proof aluminum joist system, our NIVO adjustable pedestals manufactured in France, and SPIRAL foundation screws, a flexible and eco-friendly alternative to concrete.

Fastening, precision, ventilation, stability, waterproofing, drainage... Cobra Fastener® helps increase the lifespan of your decking so that your deck lasts a long time.

## FASTENERS 04

HYBRID clips  
AIR SPACER wedge  
COBRA fasteners  
D-LOCK invisible fastener

## STRUCTURES 28

STRUCTURAL aluminum joists  
NIVO adjustable pedestals  
SPIRAL Foundation screws

## ACCESSORIES 64

BITUDECK strip  
GEODECK geotextile felt  
Installation aids  
Wedges

# FASTENERS

## DECK CLIPS



### 3 TYPES / 3 SIZES

The result of extensive experience in decking design, the HYBRID clip is a unique and innovative invisible fastening system **compatible with many decking boards** available on the market.

Its dual-material design gives it exclusive technical characteristics and performance that guarantee perfect hold and impeccable stability over time. In addition, the uniqueness of this clip with its pre-installed screw makes installation easy and gives it unparalleled speed of **execution when used in combination with the Airspacer**.

The HYBRID range adapts and meets all needs with three sizes of self-drilling stainless steel screws that do not require **pre-drilling**.

Each decking board has its own clip. Each joist has its own screw.


# HYBRID





# FAST RELIABLE INNOVATIVE

- High tear resistance
- Controls decking movement
- Quick and easy installation with Power Grip
- Fastening to wood and aluminum joists  
without pre-drilling

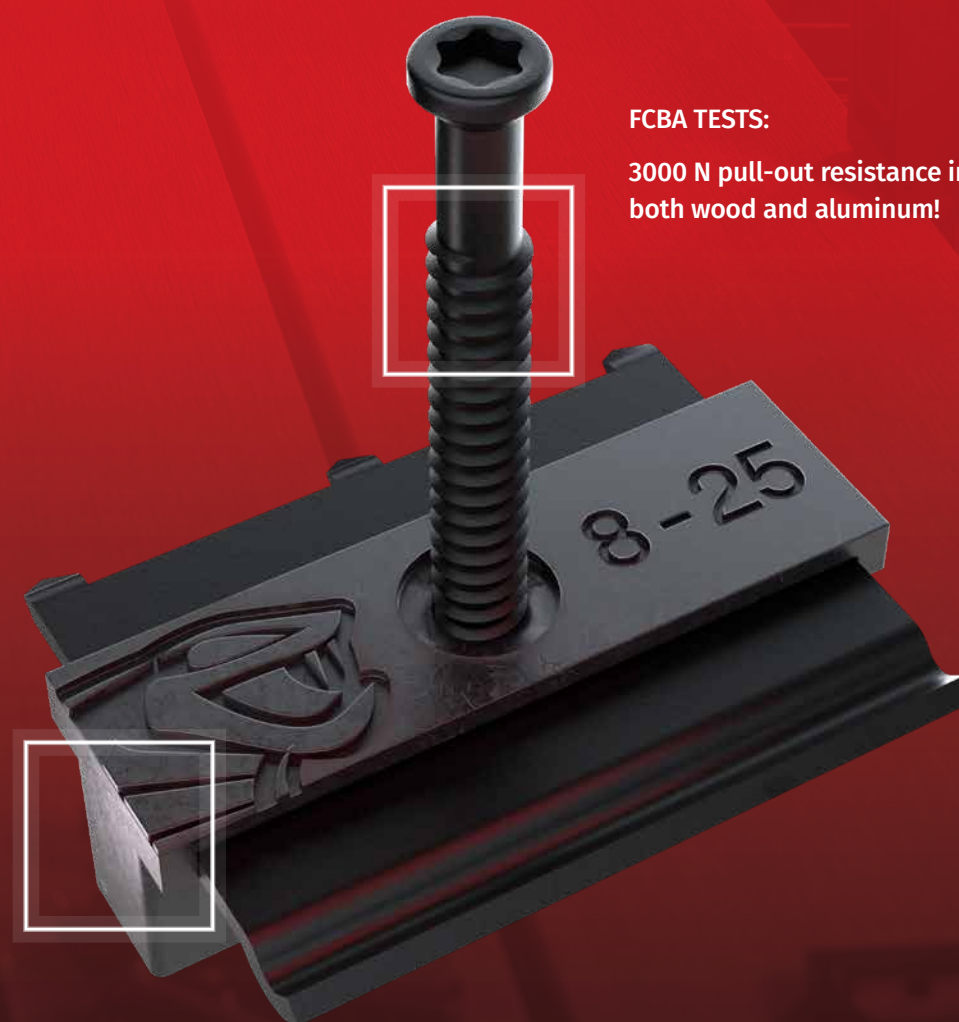

FCBA TESTS:

3000 N pull-out resistance in  
both wood and aluminum!

Design compatible with many  
grooved board profiles

30 mm wide A2 stainless steel (AISI 304) wing for optimal support. Matt black anti-glare lacquer



C1 stainless steel screw (AISI 410) pre-fitted in the factory on the clip for faster installation. Torx drive for comfort and precision. Black lacquered head

Clip with claws to hold the board firmly in place



6 mm wide UV-resistant black polypropylene body ensuring appropriate and regular spacing between the boards

Self-drilling tip for fastening in wood or aluminum without pre-drilling


Honeycomb structure that absorbs dimensional variations in the decking



The Cobra HYBRID invisible fastening system for wood or composite decks offers **unique and exclusive technical features**. Cobra HYBRID guarantees perfect stability over time and extreme resistance to uplift, **exceeding the requirements of the NF DTU 51.4 standard** for fastening decking boards.



## HYBRID 8-18

### WPC & THERMO BOARDS

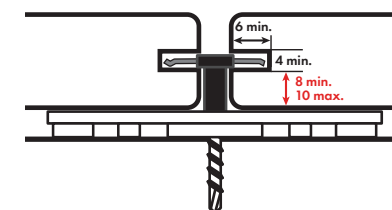


## HYBRID 7-22

### BAMBOU & THERMO BOARDS

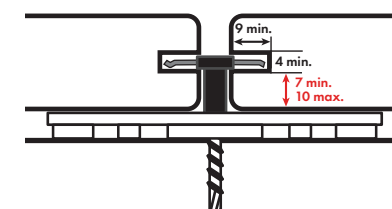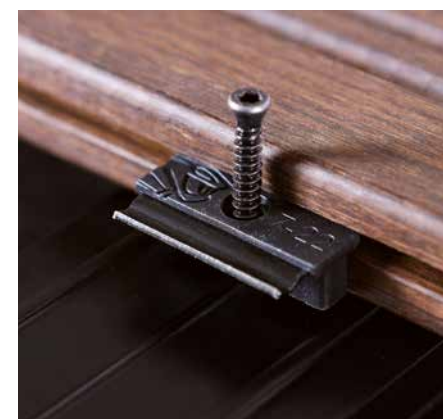

## HYBRID 8-25

### HARDWOOD BOARDS

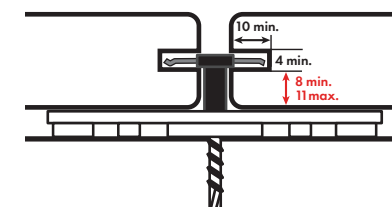

### 300 KG TEAR RESISTANCE

Tests carried out by **FCBA** with size L clips on Kapur boards laid on Kapur and aluminum joists.  
No. 403/24/0541/B-1-V1.  
February 2025



JOISTS

8-18

|   |        | ALUMINIUM | SOFT<br>WOOD | TROPICAL<br>WOOD<br>800KG/M3 | TROPICAL<br>WOOD<br>1000KG/M3 |
|---|--------|-----------|--------------|------------------------------|-------------------------------|
| S | FD1989 | ✓         |              |                              |                               |
| M | FD0993 | ✓         | ✓            | ✓                            |                               |
| L | FD1987 | ✓         | ✓            | ✓                            | ✓                             |

7-22

|   |        |   |   |   |   |
|---|--------|---|---|---|---|
| S | FD2016 | ✓ |   |   |   |
| M | FD1334 | ✓ | ✓ | ✓ |   |
| L | FD1988 | ✓ | ✓ | ✓ | ✓ |

8-25

|   |        |   |   |   |   |
|---|--------|---|---|---|---|
| L | FD0964 | ✓ | ✓ | ✓ | ✓ |
|---|--------|---|---|---|---|




Stainless  
steel C1

DRILLING  
CAPACITY

ALUMINUM joist  
WOOD joist

TX-15

4,2 x 27 mm




S

3 mm

NO

TX-15

4,2 x 35 mm




M

3 mm

Up to 800 kg/m3

TX-20

4,8 x 43 mm



L

4 mm

Up to 1000 kg/m3



Recommended  
installation with **AIR  
SPACER**  
See p.18




## HYBRID 8-18 For WPC

|        |        |
|--------|--------|
| 8-18 S | FD1989 |
| 8-18 M | FD0993 |
| 8-18 L | FD1987 |



- Boxes of 90 clips
- 4 to 5 m<sup>2</sup>
- TX-15 screwdriver bit included

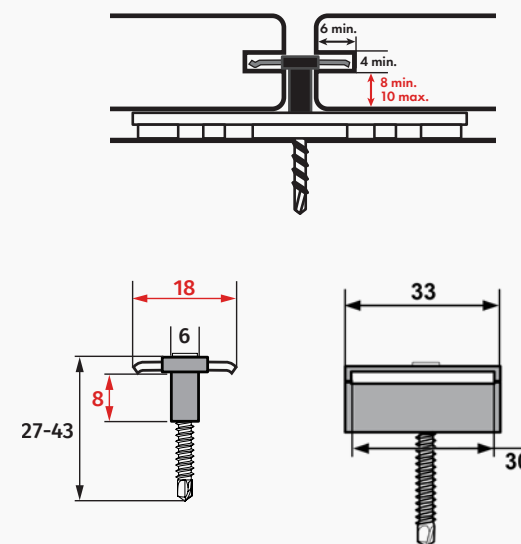



# HYBRID 7-22

For bamboo


|        |        |
|--------|--------|
| 7-22 S | FD2016 |
| 7-22 M | FD1334 |
| 7-22 L | FD1988 |



- Boxes of 90 clips
- 4 to 5 m
- TX-15 screw tip included



Recommended  
installation  
with **AIR SPACER**  
See p.18

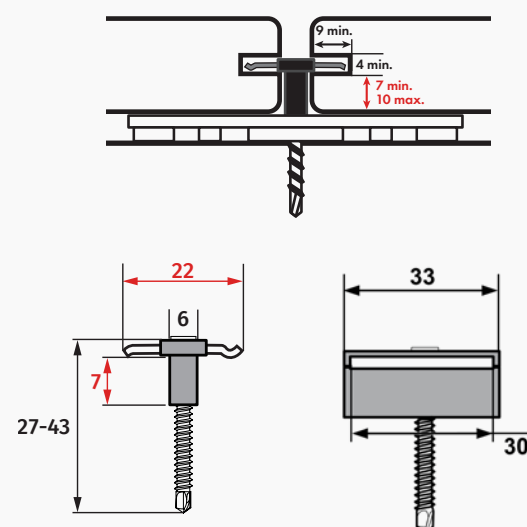

# HYBRID CLIPS



Recommended  
installation with  
**AIR SPACER**  
See p.18





## HYBRID 8-25 For hardwoods

8-25L  
FD0964



- Boxes of 90 clips
- 4 to 5 m<sup>2</sup>
- TX-20 screw cap included

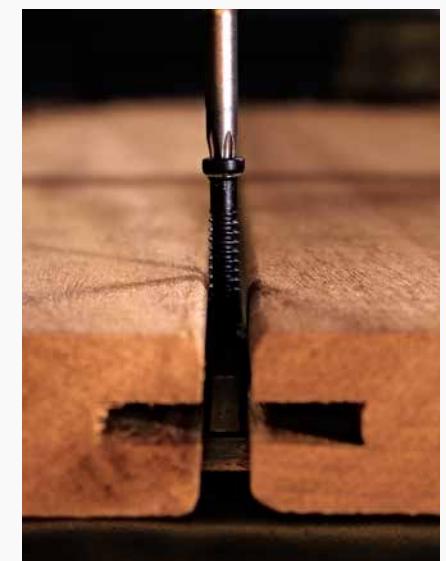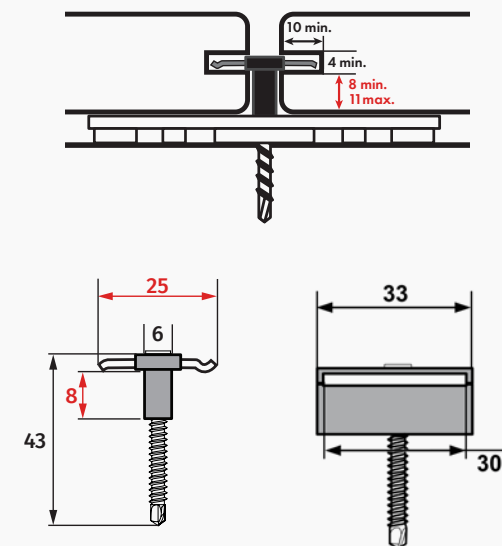


## AIR SPACER


### Ventilation spacer

FD1040

- Optimizes the installation of Hybrid clips
- Increases the lifespan of the deck
- Polypropylene
- UV, heat, and frost resistant
- Complies with DTU 51.4 requirements
- Can be cut by hand

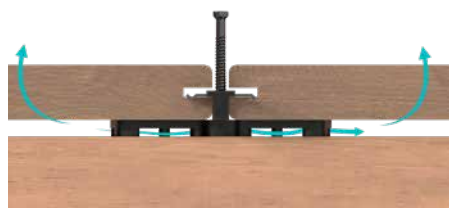

The Airspacer promotes ventilation between the board and the joist without affecting the action of the fastening clip or the movement of the wood. Its design allows for perfect assembly with Cobra clips Hybrid clips for quick and easy installation.

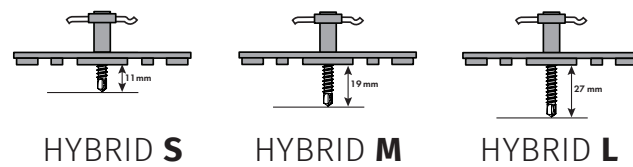


Using the Airspacer **reduces** the effective screw length **by 6 mm**



#### Capacity

- 100 AIRSPACER®
- 4 Board spacers: DECKSPACER®

The Airspacer can be cut to size for installing FD0336 starter clips, for example

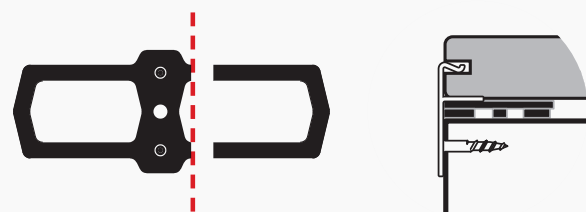




## COBRA AIR START/END

### Wood or aluminum battens

- Clip and self-drilling screw 4.2x32 mm in A2 stainless steel (AISI304) 30 pcs
- TX 20 bit included
- Suitable for use with Airspacer
- Vertical or lateral fastening
- Compatible with aluminum and wood battens
- Pre-drilling required

FD2274

| x    | y    | z     |
|------|------|-------|
| 8 mm | 4 mm | 10 mm |

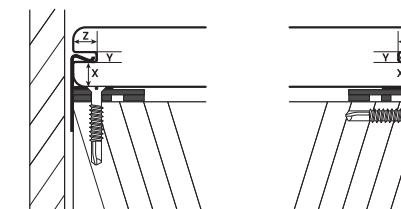


## COBRA 20 START/END

### Wooden battens

- Clips and screws 4.5x25 mm in A2 stainless steel (AISI304) 30 pcs
- R2 end cap included
- Anti-glare matte black color
- Vertical or side mounting
- Pre-drilling required

FD0336

| x    | y    | z     |
|------|------|-------|
| 8 mm | 4 mm | 10 mm |

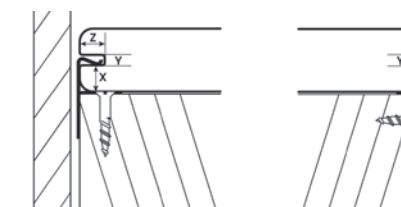


## COBRA END

### Universal end clip

- Clip and screw 4.5x25 mm in A2 stainless steel (AISI304) 30 pcs
- Anti-glare matte black color
- Fits all board heights
- Pre-drilling required

FD1432

| x              | y    | z    |
|----------------|------|------|
| All dimensions | 4 mm | 8 mm |






# A2 STAINLESS STEEL SCREWS

Wooden battens


- AISI304 stainless steel screws
- Cutting thread for better penetration into wood
- Tapered tip to reduce wood splitting
- Knurled finish to facilitate screw insertion into wood
- Deep Torx drive to prevent bit rejection and slippage
- Pre-drilling required

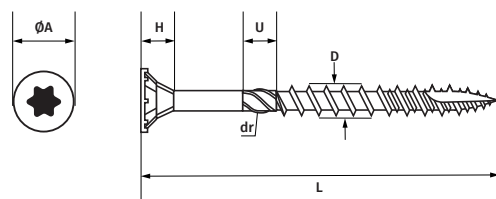

| Code FR     | A (mm) | L (mm) | U (mm) | D (mm) | dr (mm) | Torx | Quantity |
|-------------|--------|--------|--------|--------|---------|------|----------|
| <b>0601</b> | 8      | 50     | 4      | 5      | 4       | T25  | 200      |
| <b>0602</b> | 8      | 60     | 8      | 5      | 4       | T25  | 200      |
| <b>0613</b> | 10     | 70     | 10     | 6      | 5       | T30  | 100      |

**Size 5x60 mm available with lacquered head**

- 5 colors
- Bags of 50 screws

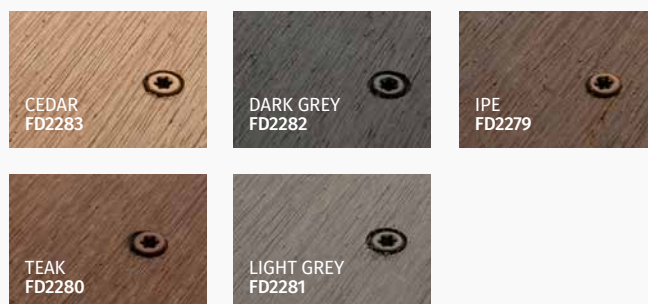

DECKING FASTENERS




## A4 STAINLESS STEEL SCREWS

### Aluminum decking

- A4 stainless steel screw, AISI316, suitable for areas highly exposed to corrosion
- Self-drilling tip for aluminum structures up to 3 mm thick
- Narrow, stepped screw head to reduce wood splintering
- Perfectly flush, optimal pressing
- Ideal for fastening finishing elements
- Pre-drilling required


FD2110 5.5x45mm (200pcs)

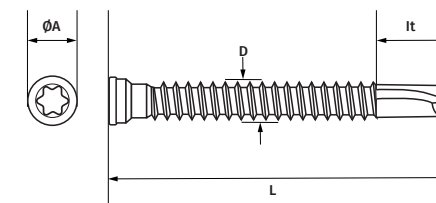

| Size      | A (mm)  | L (mm) | D (mm) | It (mm) | Torx |
|-----------|---------|--------|--------|---------|------|
| M5.5 x 45 | 7,9 - 8 | 45     | 5,5    | 9,5     | T20  |

#### Available with lacquered head

- 6 colors
- Bags of 50 screws

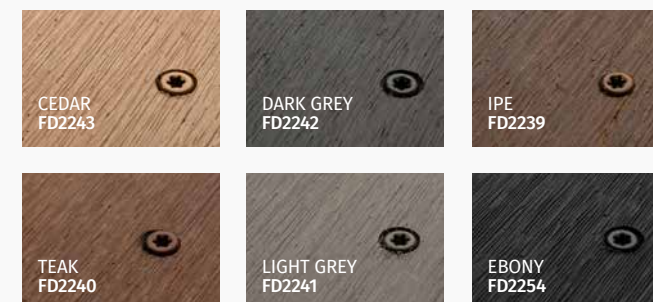



# D-LOCK

## Universal clip

FD0600

- Universal clip for decking boards 20 to 28 mm thick and 90 to 150 mm wide
- Fastening system suitable for decking boards without grooves
- Ensures ventilation under the board, in accordance with the requirements of DTU 51.4
- Robust and resistant to humidity and extreme temperatures
- Made from POM polymer material: polyoxymethylene
- Compatible with all decking and wooden structures, with pre-drilling required



INTERMEDIATE CLIP






START/END CLIP



### CAPACITY

- 110 Fastening clips 3x60x8mm
- 15 Start/End clips
- 250 stainless steel screws : 4x25 mm
- 55 stainless steel screws: 4x40 mm
- 1 Metal drilling template
- 4 Board spacers: DECKSPACER®

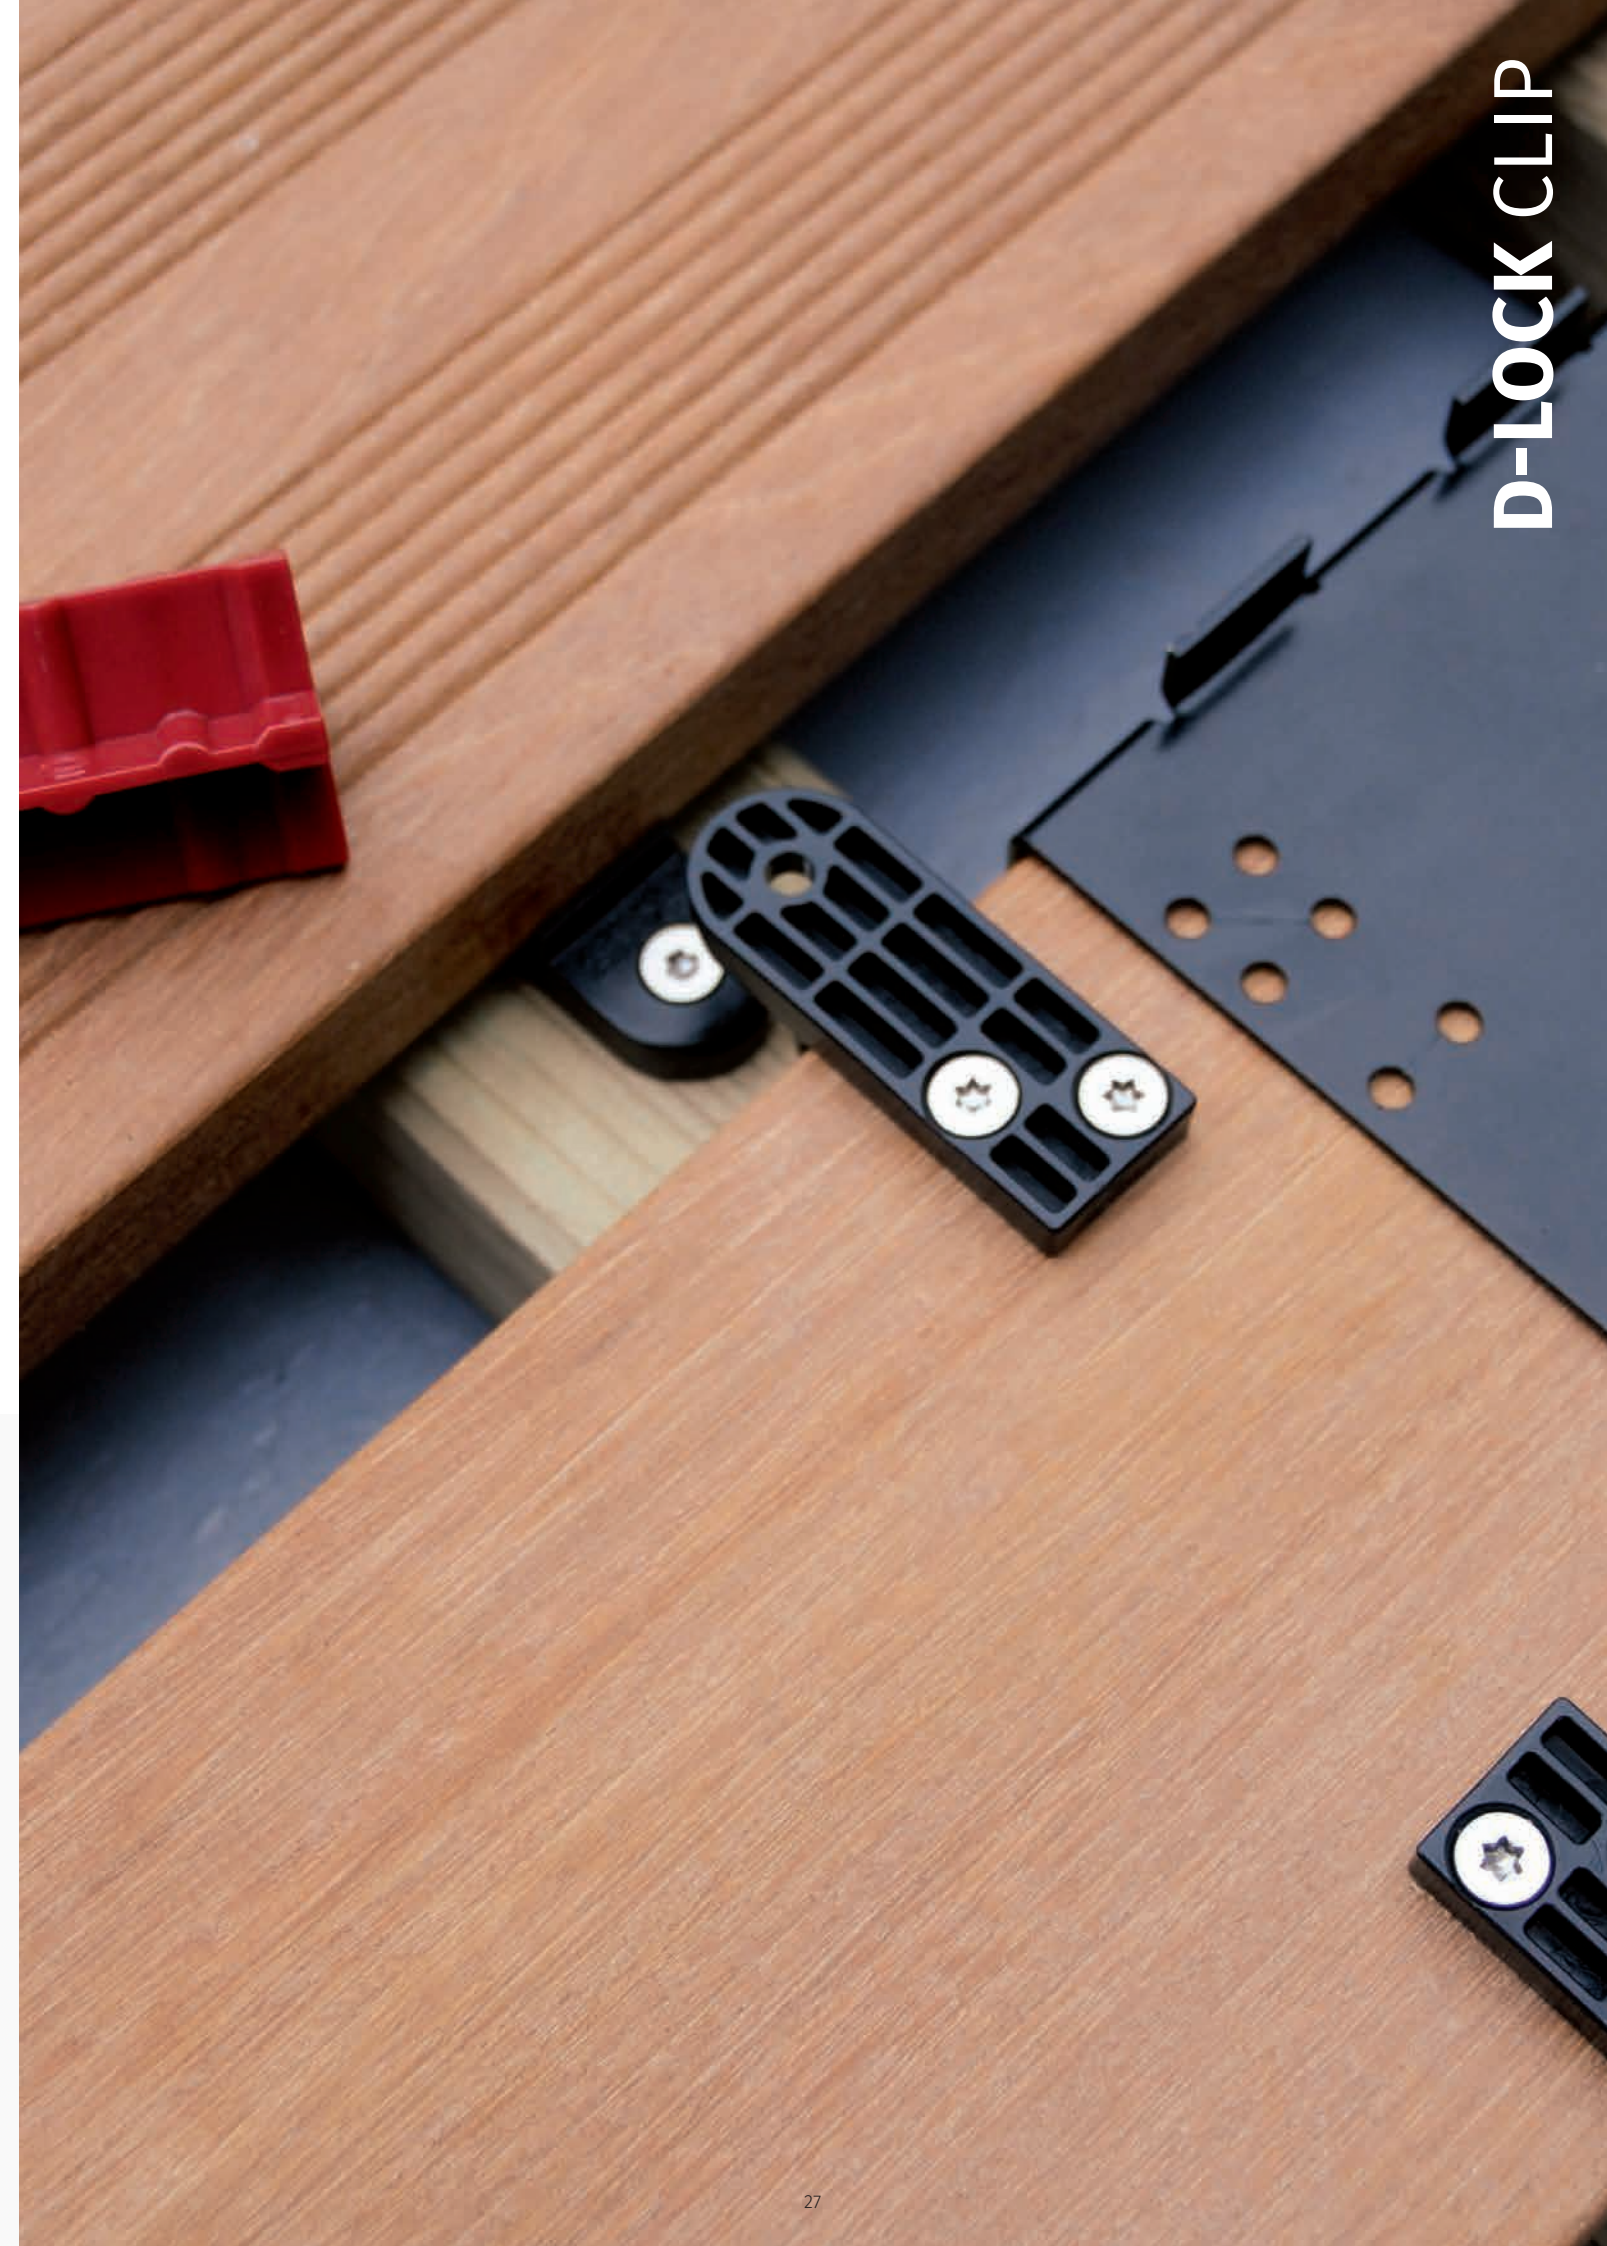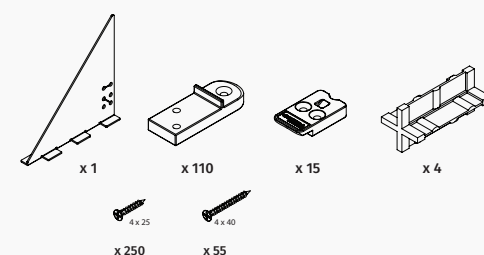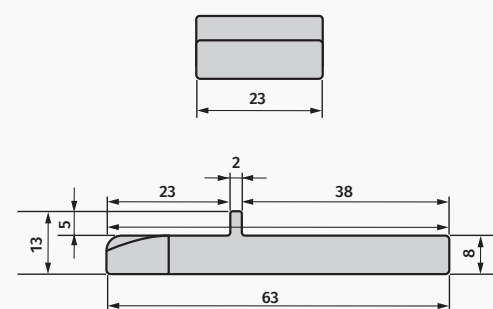

D-LOCK CLIP

# STRUCTURES

WOOD & CERAMIC DECKING



## A DECK FOR LIFE!

The STRUCTURAL system provides you with a rot-proof structure that is completely resistant to moisture and mold, offering unmatched durability. These aluminum joists are suitable for all types of environments and conditions. Unlike wood, aluminum is not subject to deformation or deterioration of its qualities.

High-performance, lightweight load-bearing elements that are easy to handle, STRUCTURAL joists are perfectly suited for designing elevated structures on adjustable pedestals or foundation screws. STRUCTURAL can therefore be installed on hard, stabilized, loose, or impermeable ground.

Its modularity allows it to meet a wide range of requirements, whether for installing composite or wooden decking boards or laying porcelain stoneware paving.



# STRUCTURAL






# LIGHT STABLE DURABLE

- Rot-proof
- Quick and easy assembly
- Excellent mechanical strength
- Performance that never deteriorates
- Perfect regularity and flatness
- Versatile (decking or tiling)
- Installation on pedestals or foundation screws

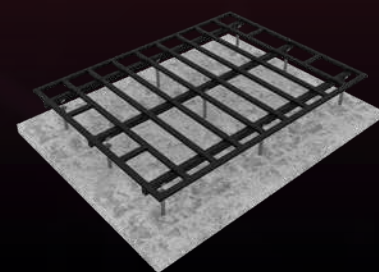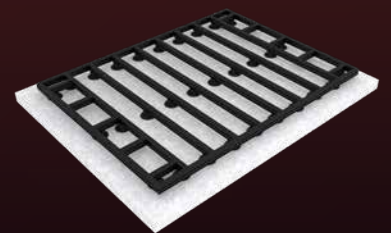

Perfect compatibility with  
HYBRID clips  
and Airspacer

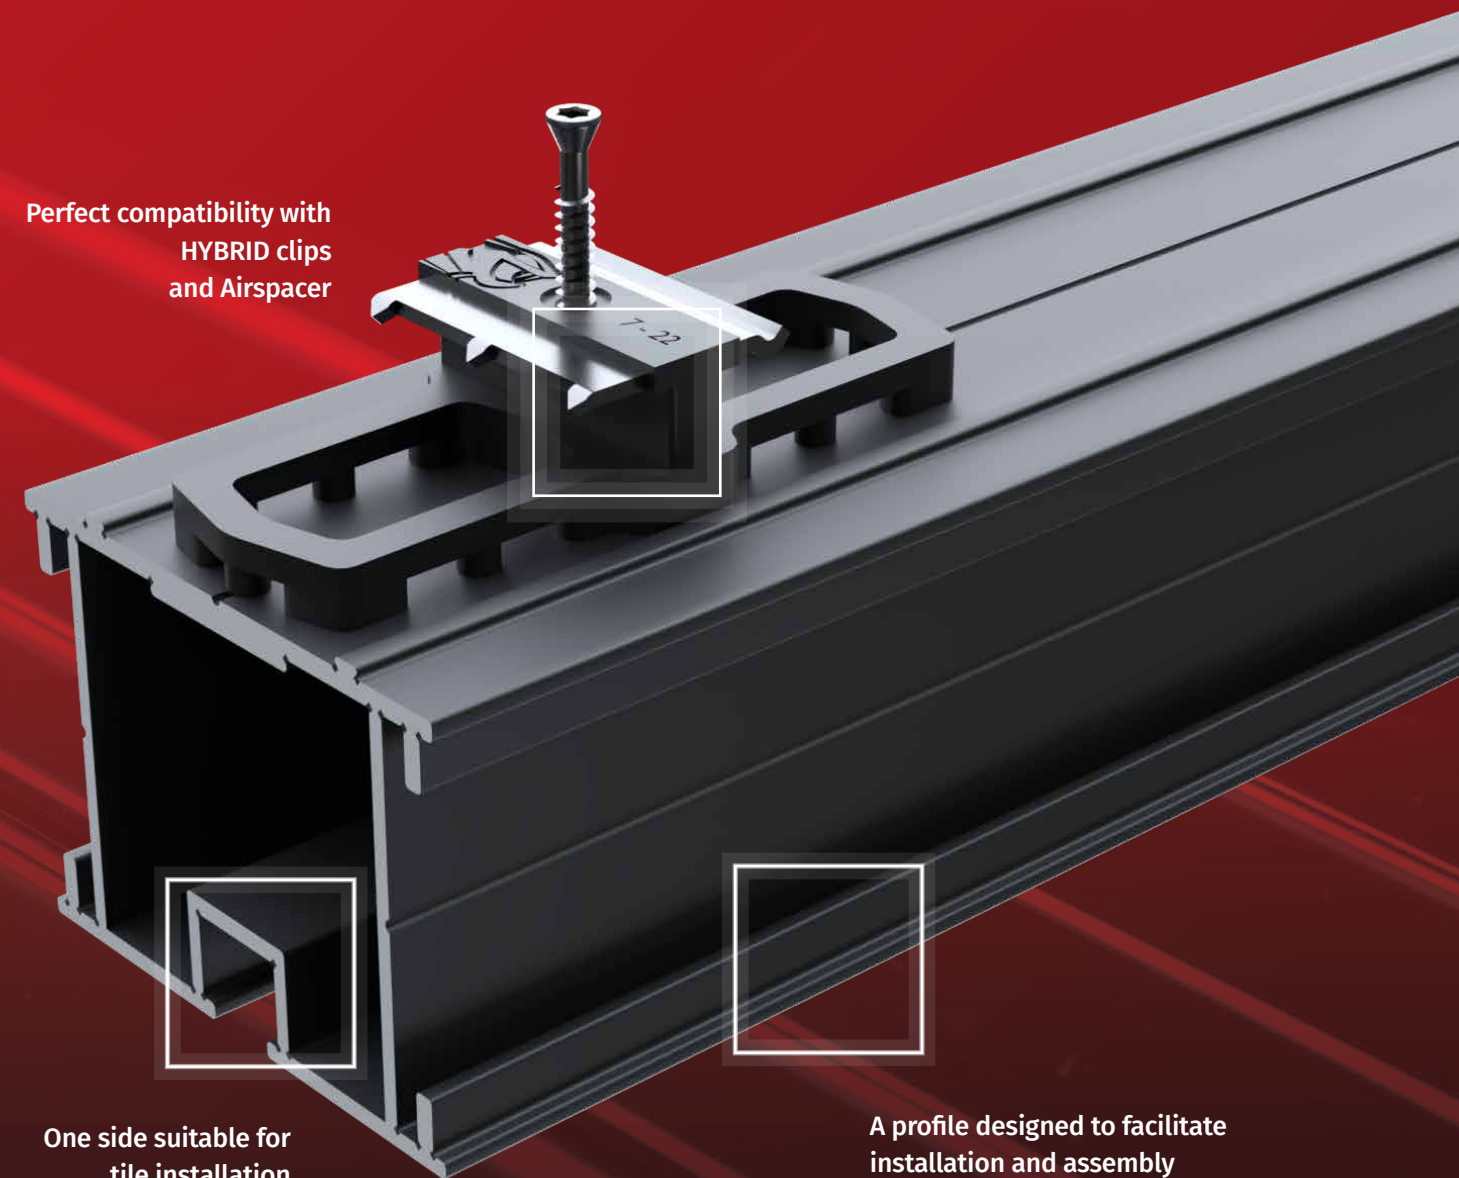

One side suitable for  
tile installation

A profile designed to facilitate  
installation and assembly



JOIST

40x24mm

200cm FD2278

400cm FD2097



JOIST

60x40mm

200cm FD2277

400cm FD1892




JOIST

60x80mm

200cm FD2275

400cm FD1893




JOIST


60x120mm



200cm FD2276

400cm FD1894



|          |                                            |                                             |
|----------|--------------------------------------------|---------------------------------------------|
| MATERIAL | EN AW 6063 (TS) aluminum alloy Black       |                                             |
| FINISH   | RAL 9005 matte lacquer finish<br>QUALICOAT |                                             |
| USE      | Top side<br>Bottom side                    | Decking installation<br>Paving installation |

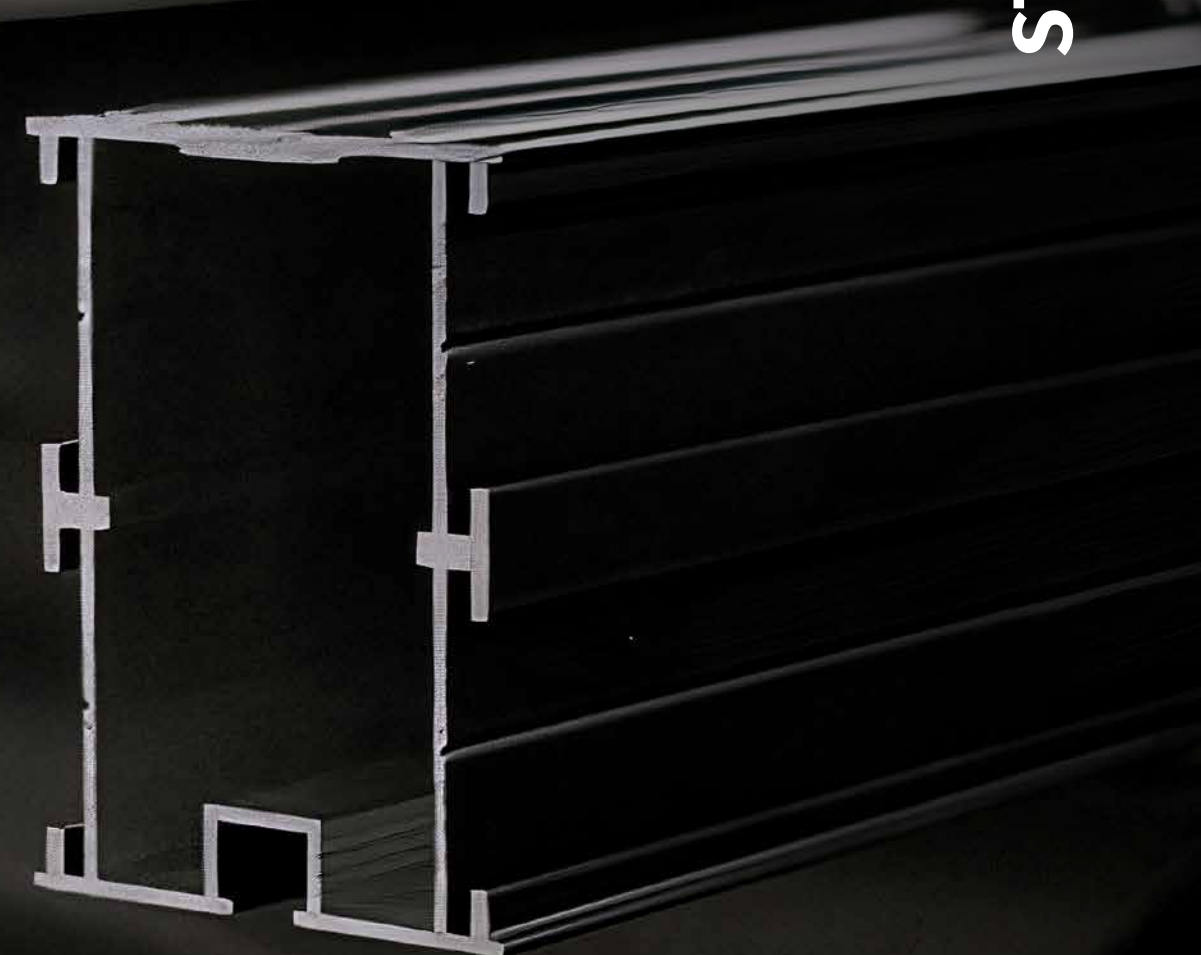

|          | 40x24mm                                                                                       | 60x40 mm                                                                                     | 60x80 mm                                                                                     | 60x120 mm                                                                                    |
|----------|-----------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|
| L 200 cm | FD2278 (1,5 kg)                                                                               | FD2277 (2,3 kg)                                                                              | FD2275 (3,5 kg)                                                                              | FD2276 (4,9 kg)                                                                              |
| L 400 cm | FD2097 (3 kg)                                                                                 | FD1892 (4,6 kg)                                                                              | FD1893 (6,9 kg)                                                                              | FD1894 (9,8 kg)                                                                              |
|          | <br>0,5M | <br>1 M | <br>2 M | <br>3 M |



External corner bracket  
FD2054



40x60mm



80x60mm



120x60mm



FD2054  
(x20)

FD1898  
(x20)



FD2094  
(x10)



FD1897  
(x10)



FD1899  
(x10)






FD2214  
(x8)





FD1903  
(x100)




## INTERIOR ANGLES



## EXTERIOR ANGLES






## OVERLAY & ANCHORS



## VERTICAL ANGLES



## T-CONNECTIONS



SINGLE SCREW (4.8 X 16 MM SELF-DRILLING)  
FOR ALL ACCESSORIES



40x60mm



80x60mm






120x60mm

### END JOINTS




FD1896  
(x4)



### JOIST CAPS




FD2093  
(x10)



### END CLIPS



FD2055  
(x10)



SINGLE SCREW (4.8 X 16 MM SELF-DRILLING)  
FOR ALL ACCESSORIES



FD1903  
(x100)



FINISHING CORNER  
FD1938 (2 ML)

Joist splicing sleeve  
FD1896



T-connection with OMEGA support  
FD2214



External corner bracket  
FD2094



Range of connections, fasteners,  
and finishes STRUCTURAL



# STRUCTURAL ACCESSORIES

Our joists have been designed with side guides that make it easy to build the components of your deck structure.

With the complete range of STRUCTURAL accessories that are easy to assemble and attach, the construction of various frames, connections, and finishing elements can be carried out quickly and accurately




# XTEND

FD1895 (2 ML)

This aluminum support allows for optimal joining of decking boards with double fastening, without the need for double joists.

Easy assembly thanks to its design for convenient screw fastening.

Withstands loads in accordance with DTU requirements 43.1 and 51.4

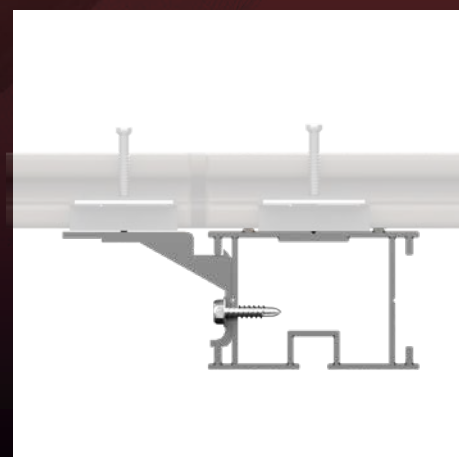

## RECUTABLE

Available in 2-meter profiles, Xtend **can be recut for optimized use** depending on the type of installation joints and the width of the decking to be butt-jointed.

## INSTALLATION WITH CLIPS



## INSTALLATION WITH SCREWS



Xtend is compatible with the installation of boards **with invisible side clips** or with suitable **through screws** for aluminum structures.

STRUCTURAL  
XTEND





## CERAM

STRUCTURAL is reversible, offering an ideal and easy solution for laying **porcelain stoneware tiles**.

The joist frame allows for optimal adjustment and leveling.

This modular, load-bearing system allows for multiple geometries and facilitates the creation of finishing elements.

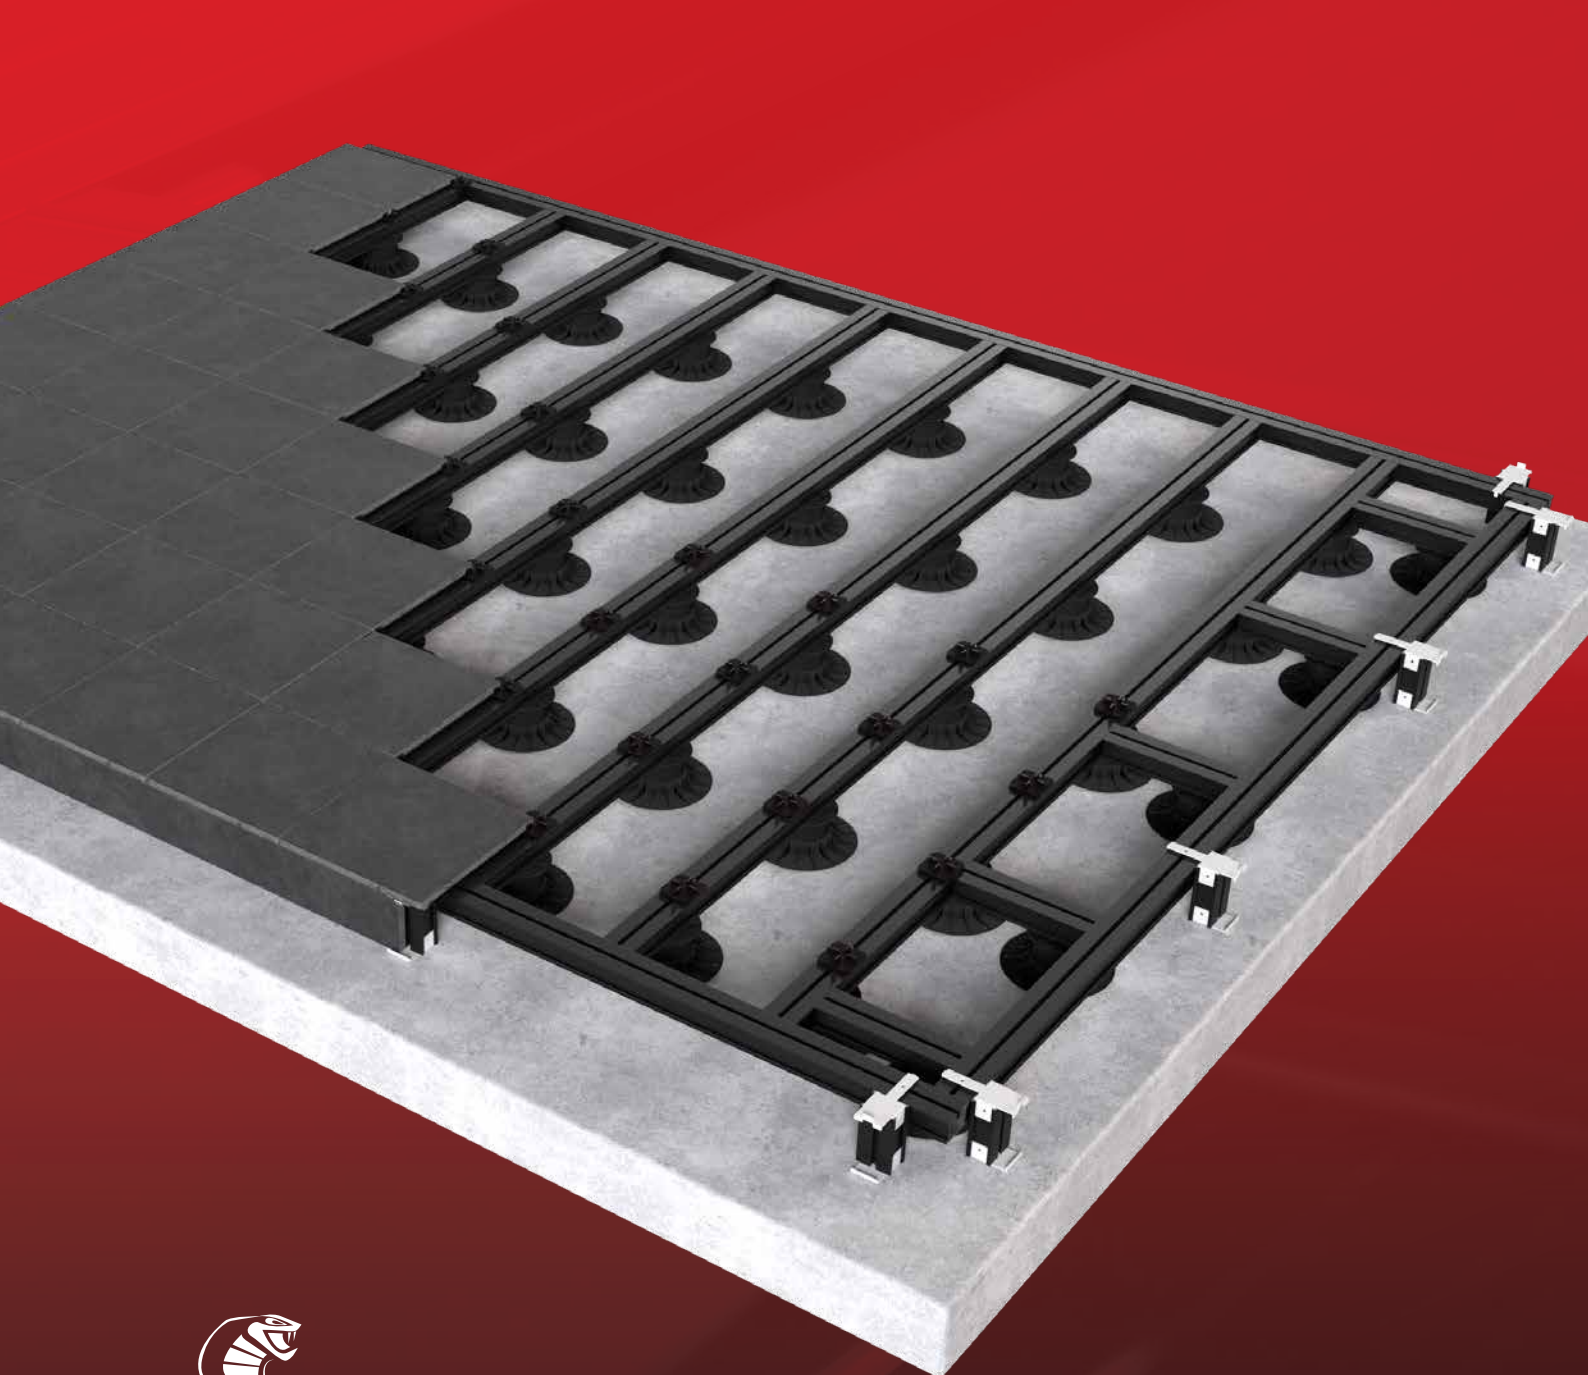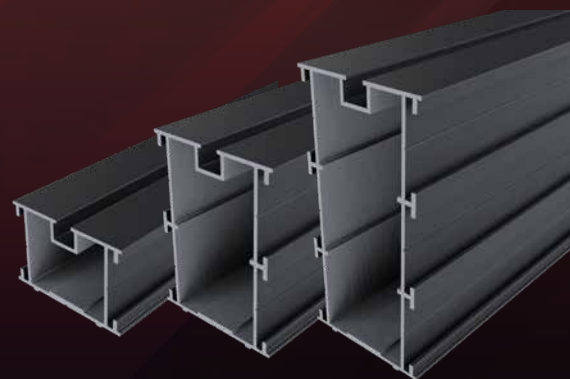

FD2235  
60x60 mm  
Thickness. 2 mm  
(x54)




The spacers fit into the groove of the joist and clip into place. They slide for easy and precise installation of the decking.

The 3mm-thick **recycled rubber** pad supplied with each spacer provides **comfort and cushioning**.



Breakable wings to adapt the spacer to different tile laying configurations.

STRUCTURAL  
CERAM

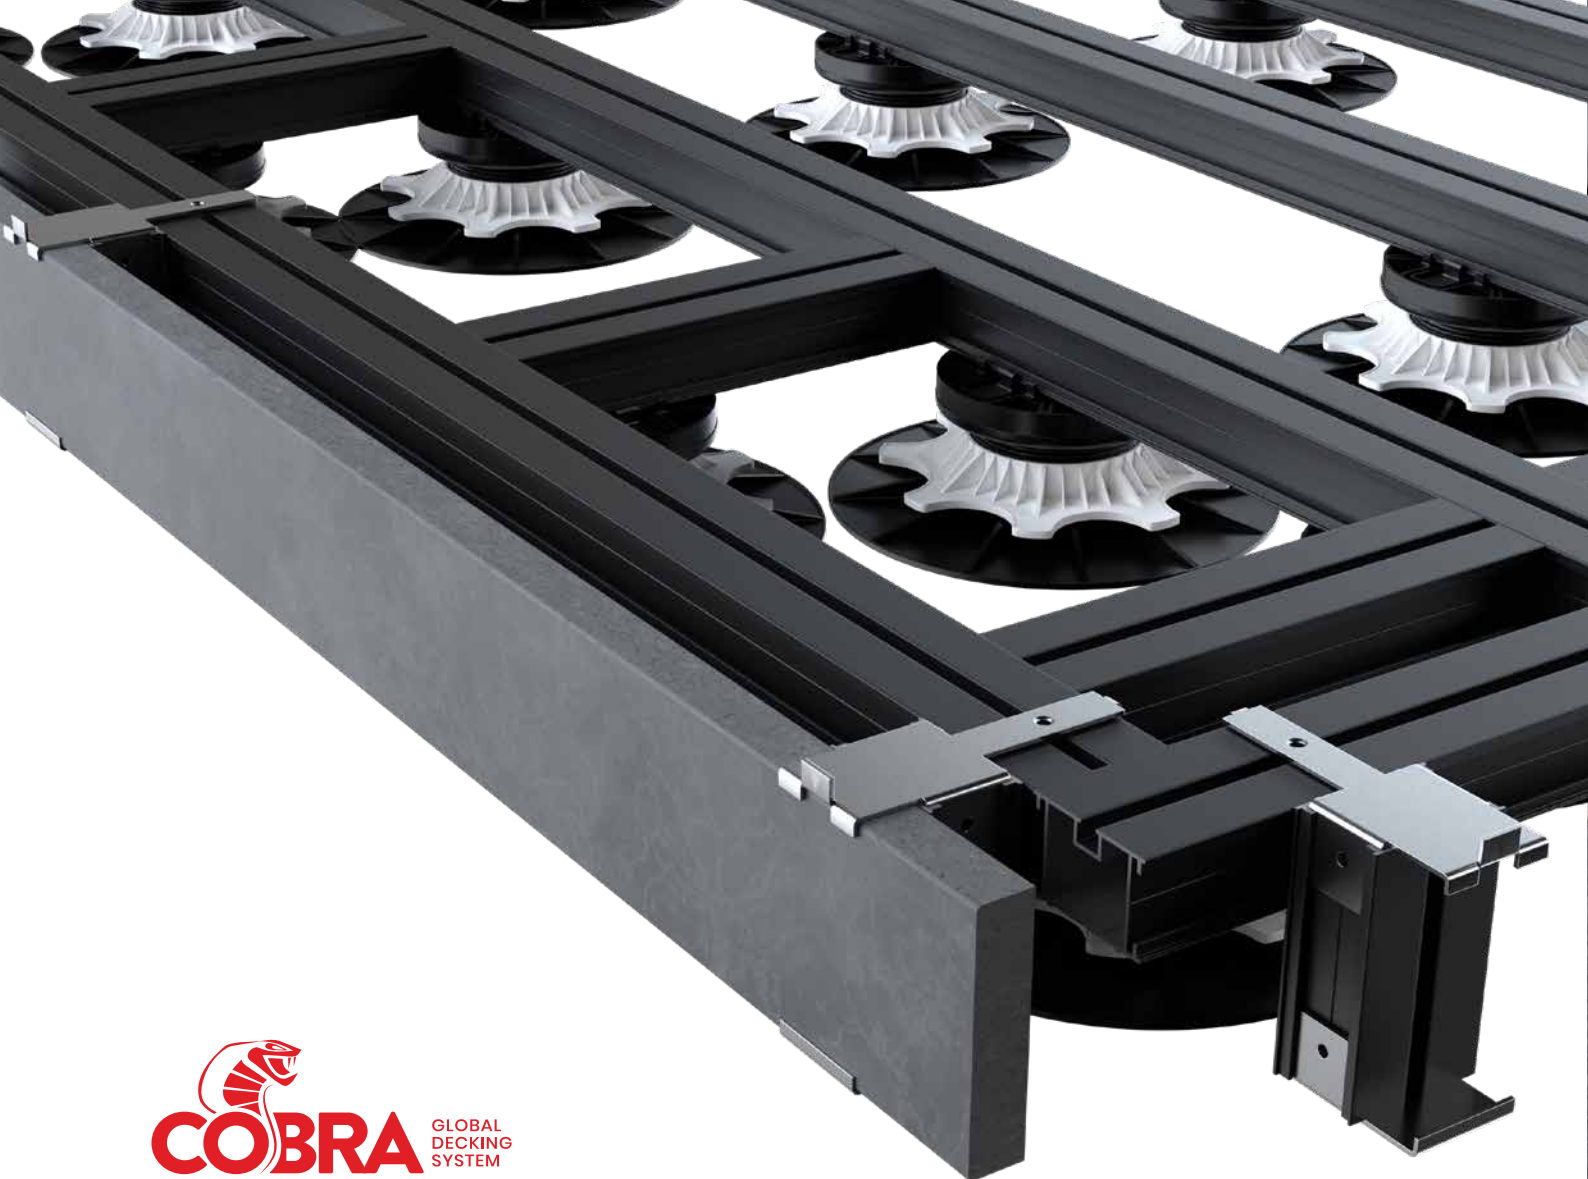

## CERAM

The system of upper and lower hooks allows for the installation of tile skirting boards and adapts to many configurations.



FD2236  
(x8)



FD2237  
(x8)



STRUCTURAL  
CERAM

# STRUCTURES

## DECKING PLOTS



### AN AGILE AND DURABLE SOLUTION

Whatever your decking project, whether decking or paving, adjustable pedestals have become an essential solution for outdoor flooring.

Sustainable products manufactured in France from recycled materials, NIVO pedestals can support heavy loads.

They allow for various elevations and meet numerous installation requirements.

They offer many advantages, such as avoiding heavy earthworks or the need for joints, and making the deck. Precisely level, create a usable surface without damaging a waterproof floor, simplify the passage of cables or pipes under the surface, facilitate the replacement of a slab, etc. They are resistant to UV rays and climatic variations.

Lightweight, rot-proof, and easy to use, NIVO pedestals comply with current regulations, such as DTU 43.1 and 51.4.

They ensure stability, aesthetics, and durability for your deck.

# NIVO






# PRECISE ROBUST PRACTICAL

- 800 kg compression load
- Weather and UV resistant
- 60 mm extensions to reach 530 mm
- Pre-assembled in the factory
- Packs of 10 pieces, shrink-wrapped




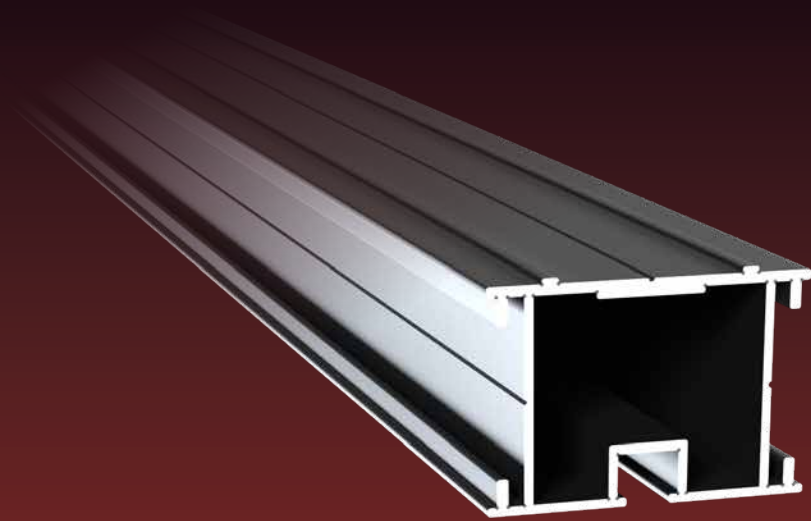


The **AL60 adapter** (FD0677) allows the **STRUCTURAL** joists to be clipped onto other pedestals available on the market (Jouplast, etc.).




## STRUCTURAL JOISTS




**H 37 - 52 mm**  
FD2120




**H 52 - 72 mm**  
FD2121



**H 62 - 92 mm**  
FD2122




**H 92 - 152 mm**  
FD2123




**H 152 - 242 mm**  
FD2124




## WOOD JOISTS




**H 25 - 40 mm**  
FD0113




**H 40 - 60 mm**  
FD0109




**H 50 - 80 mm**  
FD0110




**H 80 - 140 mm**  
FD0111




**H 140 - 230 mm**  
FD0112




**H 25 - 40 mm**  
FD0337




**H 40 - 60 mm**  
FD0273



**H 50 - 80 mm**  
FD0274



**H 80 - 140 mm**  
FD0275



**H 140 - 230 mm**  
FD0276

## CERAM PAVING



- 1 **SHOCK ABSORBER PAD** FD0898  
Provides cushioning and acoustic comfort under the decking. Th. 5 mm
- 2 **60 MM EXTENSION** FD0206  
Stackable up to a maximum of 5 to reach a height of 530 mm
- 3 **SLOPE CORRECTOR** FD0338  
Combined discs to correct slopes of 2 to 5%

# STRUCTURES

## FOUNDATION SCREW



### A PRACTICAL & ECO-FRIENDLY FOUNDATION SCREW

The SPIRAL foundation screw is a galvanized steel pile with a thread designed to be driven into and securely anchored in the ground. It allows you to install a perfectly stable and level wooden or aluminum structure that can support heavy loads.

Installation is simplified thanks to the possibility of adjustments and corrections for imperfections. The foundation screw is suitable for all kinds of installations: deckings, swimming pools, jacuzzis, carports, shelters, etc.

Available in several sizes and for different uses, it meets the need to correct a steep slope, raise a structure, or create different levels of structure without complicating construction.

This solution is a perfect alternative to creating a concrete slab. Foundation work that is less expensive, less time-consuming, preserves the garden more, and promotes drainage in the soil. The type of soil will determine the type of screw to use.


# SPIRAL





# EFFECTIVE RESISTANT VERSATILE

- High compression loads
- Resistance to tearing
- Durable / Reinforced galvanized steel
- Penetrating tip
- No concrete slab
- Removable

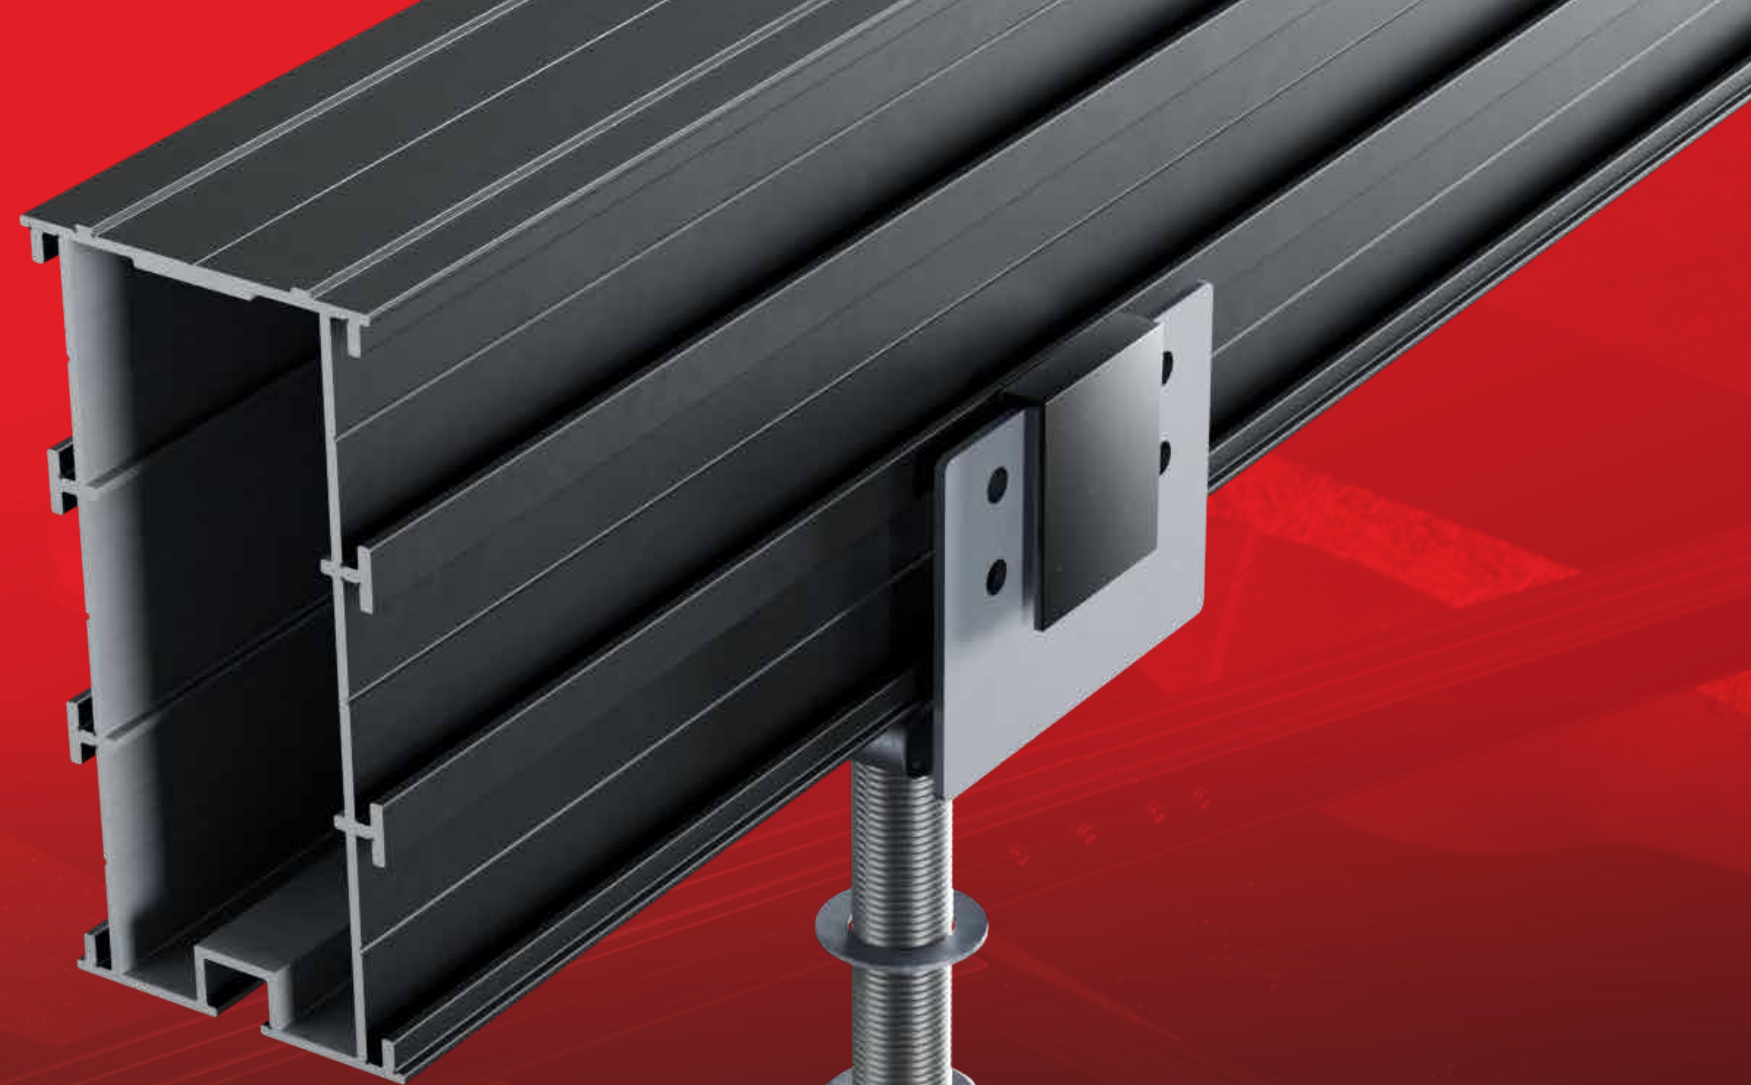

Z600 reinforced  
galvanized steel

Up to 10kN  
pressure resistance  
in firm soil

FIRM GROUND & BACKFILLS

G-800

FD1577



80 cm

G-1200

FD1578



120 cm

G-1500

FD1806



150 cm

SAND & SOFT GROUND

S-1200

FD1807



120 cm

POSTS  
(EXCLUDING  
FENCE)

P-800

FD1808



80 cm

FOUNDATION SCREWS



SPIRAL

CERTIFICATES

Material ISO 630 FE 360A  
Hot-dip galvanization EN 1461  
Reinforced galvanized steel Z600  
Average thickness 70 µm, min.55 µm  
Durability 50 years\*

Manufacturing process ISO 9001:2015  
Product EN 1090

Environmental performance ISO 14001



\* In normal exposure conditions



|   |                                                |        |   |                                                                           |                      |                  |
|---|------------------------------------------------|--------|---|---------------------------------------------------------------------------|----------------------|------------------|
| 1 | FLAT SUPPORT 90X90MM                           | FD1221 | 4 | U-SHAPED SUPPORT POST<br>Central M16x50 fixing screw and washers included | 90X90MM<br>120X120MM | FD1901<br>FD1902 |
| 2 | ADJUSTABLE JOIST SUPPORT                       | FD1809 | 5 | LEVELING DISC                                                             |                      | FD1904           |
| 3 | SPACER BRACKET<br>For adjustable joist support | FD2092 |   |                                                                           |                      |                  |



## ADAPTER FOR IMPACT WRENCH

- Connects the tool to the foundation screw
- M16 central fastening for easy, quick, and secure assembly
- 6 peripheral lugs
- Integrated spirit level
- M41 hexagonal center head
- Compatible with Milwaukee M18FHIWF1-122 or Makita TW1000 impact drivers

FD0616

## MANUAL SCREWDRIVER BAR

- Kit consisting of a pre-drilled pole for adjusting the height of the bar
- 160 cm span
- 3 bolts + nuts to secure the tool to the screw
- The bar is adjustable during screwing to facilitate pushing

FD0615





## ESSENTIAL & FUNCTIONAL

Building a durable decking is not limited to decking boards and their fastenings or the structure.

To ensure rigorous and compliant construction, installation accessories are functional elements that provide efficiency, ease of use, and precision.


Essential items in the Cobra range, such as sealing tape, various pads, and drilling aids, guarantee the longevity and aesthetics of your project.



## BITUDECK

### Waterproofing strip

- Increases the lifespan of wooden joists
- Complies with DTU 51.4 requirements
- Waterproof - Absorbs sound resonance
- Matte black color to prevent light reflections between boards
- Resistant to tearing, deformation, and temperature variations
- Easy and convenient to use
- Length: 10 meters
- **FD0145 : 75 mm x 1,5 mm**
- **FD2077 : 100 mm x 1,5 mm**

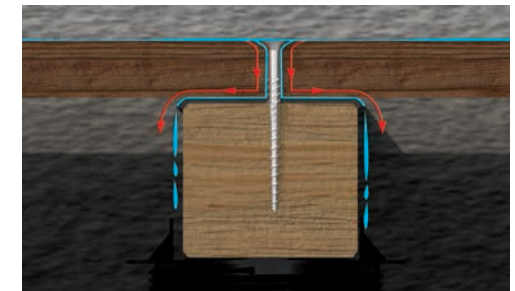

BITUDECK adhesive sealing tape significantly extends the life of your wooden structure by effectively protecting it from moisture

|                             |                                   |
|-----------------------------|-----------------------------------|
| Top side                    | Elastomeric bitumen self-adhesive |
| Bottom side                 | HDPE Film                         |
| Tensile strength            | 150 N                             |
| Tear resistance at the nail | 25 N                              |
| Operating temperature       | -20°C à +70°C                     |
| Storage temperature         | +15°C                             |
| Water resistance            | 0.3 MPa, 120 min                  |
| Adhesive strength           | 1.5                               |



# GEOTEXTILE 100 GR/M²

## Practical & Easy

- Polypropylene
- Opaque black
- Prevents weed growth
- Rot-proof
- Resistant
- Simply lays on the ground, soil, or grass
- Water permeable, promotes drainage
- Thickness 0.55 mm – 2 x 10 meters

FD0607

### PROPERTIES

| Weight             | Thickness                             | Resistance<br>tear resistance* |
|--------------------|---------------------------------------|--------------------------------|
| 100 g/m²           | 0.55 mm                               | 0.413 kN                       |
| <hr/>              |                                       |                                |
| Tensile<br>width** | Elongation at maximum<br>tensile load |                                |
| 13.6 kN/m          | 132%                                  |                                |

\*ISO 12236 : 2006  
\*\*ISO 10319 : 2015



DECKING ACCESSORIES



## POWER GRIP Deck clamp

- Holds up to 4 rows of boards
- Allows for quick and precise screw fastening of clips
- Pack of 2 clamps with 4 adapters for decking
- 60 cm carbon steel bar
- Ergonomic handle with grip


FD2098



## COBRA WRENCH Board straightener


- Allows you to straighten warped deck boards
- Easy to use, for right- or left-handed users
- Ergonomic and lightweight tool
- Supplied with different sized pins, adjustable to the dimensions of the joists

FD0216



## COBRA DRILL BIT Pre-drilling

- Drills and countersinks the board for a perfect finish
- Aluminum stop collar with bearing
- Non-marking rubber shock-absorbing ring
- Adjustable countersink and drill bit with included hex key
- 2 high-strength HSS steel drill bits
- Carbon steel hex shank, 45–48 HRC

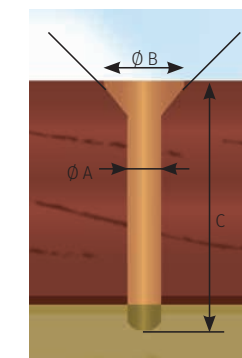

FD1579

|          | A      | B    | C max |
|----------|--------|------|-------|
| Drill #1 | 3,6 mm | 9 mm | 35 mm |
| Drill #2 | 4,0 mm | 9 mm | 35 mm |



## COBRA LINER Drilling template



- Ensures perfect alignment of screws when screwing down decking boards
- Guarantees that screws are 20 mm from the edge of the boards, in accordance with DTU 51.4
- Adjustable to all deck board widths
- Saves time, easy to use
- Supplied with 4 DECK SPACER spacers


FD0603

## DECK SPACER Even joints

- Ensures regular spacing between boards for expansion and contraction of the wood, in accordance with DTU 51.4 requirements
- Guarantees linear expansion clearance at the ends of composite wood boards
- 4 fins with 4 different spacings

FD0604

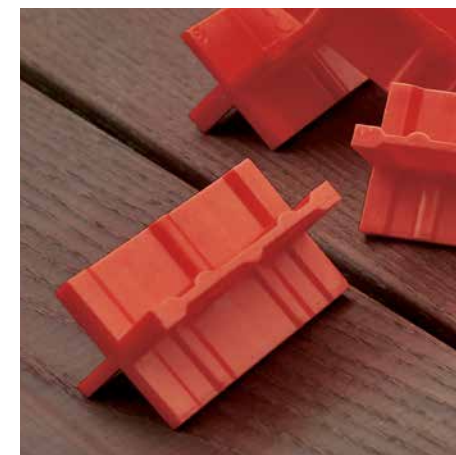



Thickness  
3 mm



Thickness  
4 mm



Thickness  
2 mm



Thickness  
5 mm

## FLATPAD

- Quick and accurate leveling
- Allows for corrections of thicknesses ranging from 2 to 5 mm
- Rot-proof, solid, and UV-resistant

FD0135

## RUBBERPAD

- Increases the lifespan of your structure
- Allows rainwater to flow under the joists
- Protects the joists from ground moisture
- Rot-proof
- Shore hardness: 55A
- Density: 730 kg/m3



8x90x90 mm (24 pcs)

FD0210

3x60x90 mm (60 pcs)

FD0609



Thickness  
5-20 mm



Thickness  
10-15 mm



Thickness  
20-30 mm

## WEDGEPAD


- Quick and accurate leveling
- Allows thicknesses of 10 to 30 mm to be corrected
- Rot-proof, solid, and UV-resistant
- Can be screwed or glued

FD0610

# My Deck Planner

## CREATE YOUR DECKING PROJECT EASILY

An online tool that simplifies the design of wooden deckings. Draw, configure, and visualize your project with a customized plan and a precise list of materials.

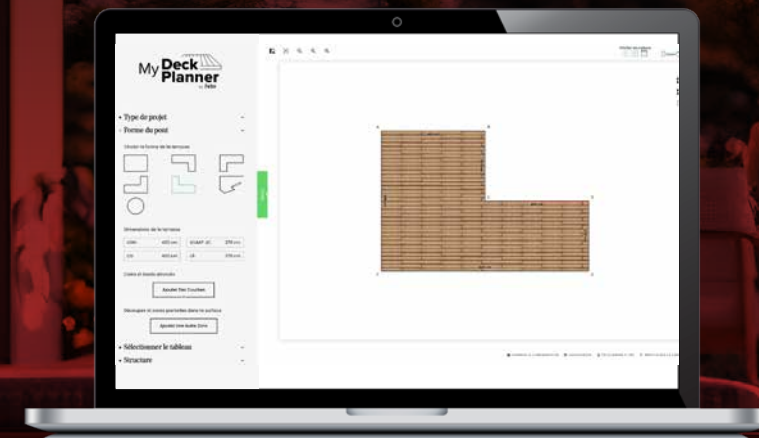

[en.mydeckplanner.com](https://en.mydeckplanner.com)



**cobrafastener.com**